



PSL12M-Q2



TCM Lite Range, optimal specification for day to day operations, without compromising engineering excellence, long-term performance and outstanding reliability.

EASY TO USE, SIMPLE TO MAINTAIN.

TCM PSL12M-Q2 with **compact, lightweight** design, **initial lift** and 1200 kg load capacity, is configured for light-duty, double pallet applications and **agility in narrow aisles and on mezzanines**, improving productivity and reducing operator fatigue. The steel chassis cover provides robust protection against impact, lowering maintenance costs and extending truck life.

The high capacity, **fast charging 24V/60Ah Li-ION battery** is long-lasting with low operating costs and is maintenance free. Includes in-built **Battery Management System** and integrated charger for charging anywhere.

Ergonomic, multi-functional tiller head with creep button for vertical drive function enhances operator comfort and control, especially in tight spaces. **Automatic speed reduction** in curves promotes safer handling of unstable loads, reducing the risk of accidents and damage. **Mono mast** configuration ideal for mezzanine applications and limited lift height requirements, confirm a compact and effective stacking solution.

PIN code access and option to add RFID access, restricts use to authorised operators, ensuring ultimate safety and control of fleet. Conveniently placed external diagnostics port speeds up servicing and fault resolution.




STANDARD SPECIFICATIONS PRELIMINARY

CHARACTERISTICS			
1.1	Manufacturer		TCM
1.2	Manufacturer's model designation		PSL12M-Q2
1.3	Power source		Battery
1.4	Operator type		Pedestrian
1.5	Load capacity	Q	kg 1200
1.6	Load center distance	c	(mm) 600
1.8	Load wheel axle to fork face (forks lowered)	x	(mm) 760
1.9	Wheelbase	y	(mm) 1147
WEIGHT			
2.1b	Truck weight without load, with maximum battery weight		kg 500
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg 490 / 1210
2.3	Axle loadings without load & maximum battery weight, drive / load side		kg 355 / 145
WHEELS, DRIVE TRAIN			
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side		P / P
3.2	Tyre dimensions, drive side	(mm)	210 x 75
3.3	Tyre dimensions, load side	ø (mm)	84 x 93
3.4	Castor wheel dimensions (diameter x width)	(mm)	100 x 50
3.5	Number of wheels, load / drive side (x = driven)		1x +1/2
3.6	Track width (center of tyres), drive side	b10 (mm)	550
3.7	Track width (center of tyres), load side	b11 (mm)	400
DIMENSIONS			
4.2a	Height with mast lowered	h1 (mm)	see table
4.3	Free lift	h2 (mm)	see table
4.4	Lift height (stroke)	h3 (mm)	see table
4.5	Height with mast extended	h4 (mm)	see table
4.9	Height of tiller arm / steering console (min./max.)	h14 (mm)	710 / 1150
4.15	Fork height, fully lowered	h13 (mm)	90
4.19	Overall length	l1 (mm)	1710
4.2	Length to fork face	l2 (mm)	560
4.21	Overall width	b1 (mm)	800
4.22	Fork dimensions (thickness, width, length)	s / ø / l (mm)	60 / 180 / 1150
4.25	Outside width over forks (minimum / maximum)	b5 (mm)	570
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2 (mm)	24
4.33a	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise	Ast (mm)	2197
4.34a	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise	Ast (mm)	2145
4.35	Turning radius	Wa (mm)	1350
PERFORMANCE			
5.1	Travel speed, with / without load	km / h	4.2 / 4.5
5.2	Lifting speed, with / without load	m / s	0.11 / 0.14
5.3	Lowering speed, with / without load	m / s	0.13 / 0.11
5.8	Maximum gradeability with / without load	%	5 / 10
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)		Electromagnetic
ELECTRIC MOTORS			
6.1	Drive motor capacity (60 min. short duty)	kW	0.65
6.2	Lift motor output at 15% duty factor	kW	2.2
6.4	Battery voltage/capacity at 5-hour discharge	V / Ah	24 / 60
6.5	Battery weight	kg	17
6.6b	Energy consumption according to VDI60 cycle	kWh / h	0.6
MISCELLANEOUS			
8.1	Type of drive control		DC
10.7	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, in work LpAZ	dB (A)	<70

tcm.eu

© 2026 MLE B.V. (registration no. 33274459). All rights reserved. MLE B.V. reserves the right to make any changes without notice concerning colours, equipment or specifications detailed in this brochure, or to discontinue individual models. The colours of vehicles delivered may differ slightly from those in this brochure. The specifications vary for different countries depending on local market conditions. Please consult your local dealer to ensure that the vehicle delivered accords with your expectations. All values are determined based on the standard condition and may vary, due to motor and system tolerances, condition of the truck and operational conditions. Some equipment shown on photos may be optional. WEST2573-0126

DIMENSIONS PSL12M-Q2

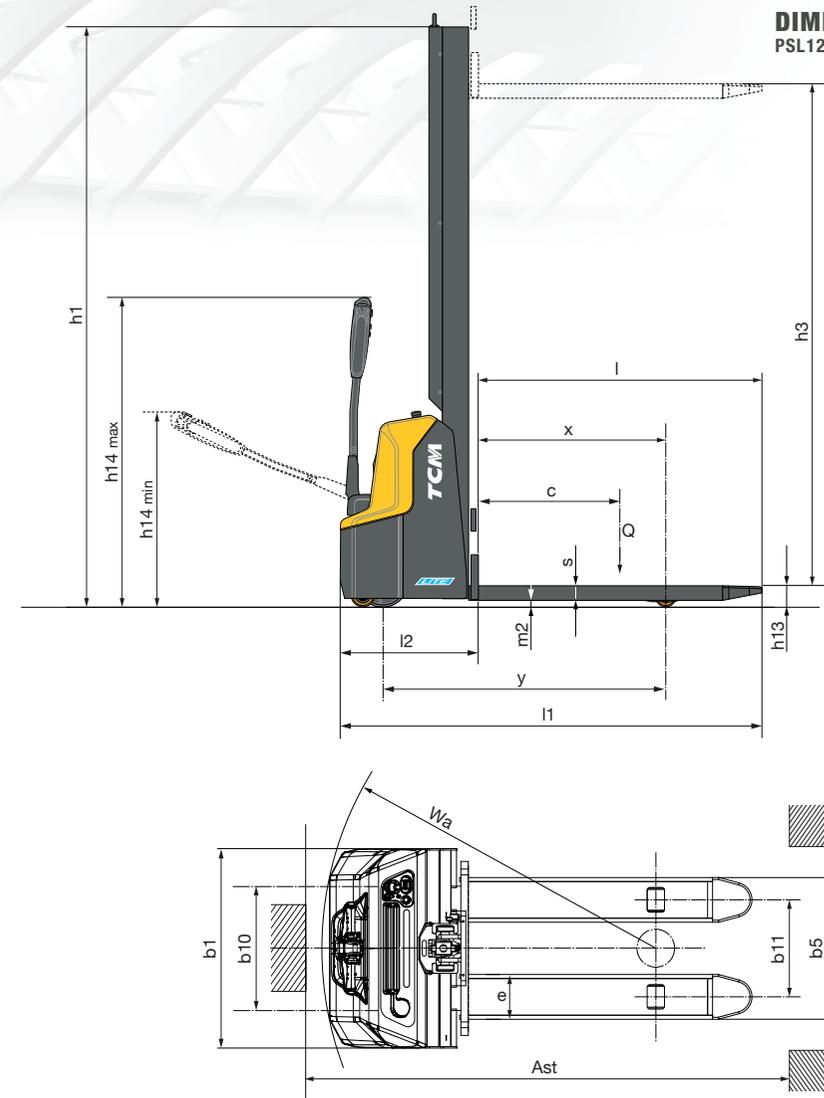

MAST SPECIFICATIONS

OPTIONS	
Mast height: 800mm, 1600mm and 2000mm - to suit different lift requirements	
Fork size 685 x 1150mm - for wider pallet types	
RFID access - for improved security and ease of use (alternative to PIN code)	
UK specific charger plug	

MAST TYPE	Lift + fork height (mm)	Lift height (mm)	Lowered mast height (mm)	Free lift height (mm)	Extended mast height (mm)
	h3 + h13	h3	h1	h2	h4
SINGLE STAGE	800	714	1210	714	1210
	1600	1514	1930	1514	1930
	2000	1914	2330	1914	2385